

Soft Step No. 427

Performance: GOOD



Black/Yellow

Soft Step is a dense blown-vinyl sponge, and one of the most affordable anti-fatigue mats on the market. It provides a “soft step” to lessen worker fatigue and is available in stock sizes or rolls that are easily cut to size.

Specs

Uses All dry work areas

Compound Blown vinyl sponge

Compression .210 inches @ 35 psi per ASTM D575

Coefficient of Friction .91 Dry per ASTM F1677

Tabor Abrasion 3% lost @ 1,000 cycles per Fed Std. 193

Flammability “A” Rating per MVSS 302

Edges Rounded on stock sizes. Safety beveled on cut lengths

Thickness 3/8”

Warranty 1 year, conditional

Stock Sizes




Part Number	Size
427.38x2x3	2’ x 3’
427.38x3x5	3’ x 5’
427.38x3x12	3’ x 12’
427.38x2x60	2’ x 60’
427.38x3x60	3’ x 60’
427.38x4x60	4’ x 60’

Non-Stock Sizes

Part Number	Size
427.38x2Cut	2’ Cut
427.38x3Cut	3’ Cut
427.38x4Cut	4’ Cut

Cut Sizes up to 60’ in length

Specify Color: Black (BK), Gray (GY), Black/Yellow (BYL) when ordering.

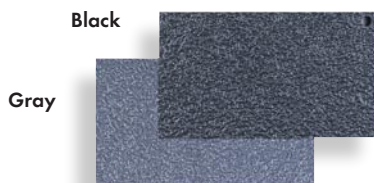

Deluxe Soft Step No. 444

Performance: BETTER



Gray

Specifically designed for comfort, Deluxe Soft Step has a thicker, softer sponge formulation. For extra relief from fatigue at a reasonable price, Deluxe Soft Step is the mat of choice.

Specs

Uses All dry work areas

Compound Blown vinyl sponge

Compression .265 inches @ 35 psi per ASTM D575

Coefficient of Friction .91 Dry per ASTM F1677

Tabor Abrasion < 3% lost @ 1,000 cycles per Fed Std. 193

Flammability “A” Rating per MVSS 302

Edges Rounded on stock sizes. Safety beveled on cut lengths

Thickness Approx. 5/8”

Warranty 1 year, conditional

Stock Sizes

Part Number	Size
444.58x2x3	2’ x 3’
444.58x3x5	3’ x 5’
444.58x2x60	2’ x 60’
444.58x3x60	3’ x 60’
444.58x4x60	4’ x 60’

Non-Stock Sizes

Part Number	Size
444.58x2Cut	2’ Cut
444.58x3Cut	3’ Cut
444.58x4Cut	4’ Cut

Cut Sizes up to 60’ in length

Specify Color: Black (BK), Gray (GY) when ordering.

