

Ultra-Tred ArmorCote No. 440



WEARWELL®

You're in good company™

Performance: **GOOD**

Ultra-Tred ArmorCote combines the comfort of a soft, PVC sponge with a more chemically resistant surface. A tremendously versatile, yet affordable mat, its **double** thick **urethane coating** offers more abrasion resistance than comparable sponge products. Ideal for laboratories and medium traffic areas.

Specs

Uses All dry work areas

Compound Blown vinyl sponge

Compression .178 inches @ 35 psi per ASTM D575

Coefficient of Friction 1.03 Dry per ASTM F1677

Tabor Abrasion 2% lost @ 1,000 cycles per Fed Std. 193

Flammability "A" Rating per MVSS 302

Edges Rounded on stock sizes. Safety beveled on cut lengths


Thickness 3/8"

Warranty 1 year, conditional


Color Black/Yellow (BYL)



Urethane Coating



Blown vinyl sponge

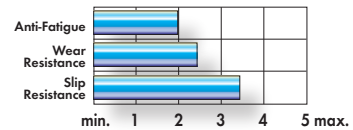

Stock Sizes

Part Number	Size
440.38x2x3BYL	2' x 3'
440.38x3x5BYL	3' x 5'
440.38x3x12BYL	3' x 12'
440.38x2x60BYL	2' x 60'
440.38x3x60BYL	3' x 60'
440.38x4x60BYL	4' x 60'

Non-Stock Sizes

Part Number	Size
440.38x2CutBYL	2' Cut
440.38x3CutBYL	3' Cut
440.38x4CutBYL	4' Cut

Cut Sizes up to 60' in length